

MECAIR

COFFRET PILOTES CSN



PROTECTION
MANUTENTION
FILTRATION

VRAC



PROTECTION | MANUTENTION | FILTRATION

www.pmfiltration.com

MECAIR RAIN TIGHT ENCLOSURE

CSN



DESCRIPTION

The CSN waterproof enclosure is designed for the piloting of diaphragm valves type VEM, and is available in the following models:

- **CSN 5:** from 1 to 5 solenoid pilots
- **CSN 8:** from 6 to 8 solenoid pilots
- **CSN 12:** from 9 to 12 solenoid pilots

The CSN enclosure is IP67 approved. Each solenoid pilot, energised in sequence, commands a corresponding VEM type diaphragm valve, by way of O.D. 8 mm pneumatic tube being less than 2 metres in length. The CSN enclosures are supplied complete with fixing brackets. The common terminal is pre-wired. The CSN solenoid base is manufactured from extruded aluminium, while the cover is in diecast aluminium, both anodised for protection against aggressive agents. The CSN enclosure features a common exhaust port, located on the underside of the unit. The exhaust is open to the atmosphere and can be piped or muted with a silencer. For low-temperature applications, enclosures are available with a thermostatically controlled heating device model "GRT" that keeps the internal temperature at +4°C.

The GRT is available in two models:

- **GRT 70:** for CSN 5
- **GRT 120:** for CSN 8 and CSN 12.

The CSN Enclosure conforms to ATEX II 3D Extc IIIC T100°C DC IP67.

GENERAL CHARACTERISTICS

Operating temperature	-20°C/+60°C
Weight	CSN 5 - 3.5 kg CSN 8 - 5 kg CSN 12 - 7 kg

CONSTRUCTION FEATURES - ENCLOSURE

Cover	Diecast aluminium (anodised)
Base	Extruded aluminium (anodised)
Plunger	Stainless steel
Spring	Stainless steel
Gaskets	NBR

ELECTRICAL CHARACTERISTICS

Coil insulation	Class H
Electrical connection	3/4" female Gas
Electrical protection	IP67, CENELEC Certificate GR-93 / 032409
Voltage and frequency	AC: 50/60 Hz: 24/110/220 V DC: 24/110 V
Pneumatic connections	To VEM 1/4" valve female Gas Common exhaust No. 2 connections 3/8" female Gas

HOW TO ORDER

Part Number Code: **CSN 5 - ..V/..Hz - R**

CSN

Waterproof enclosure IP67

CSN 1 + 5 (small enclosure)
CSN 6 + 8 (medium enclosure)
CSN 9 + 12 (large enclosure)

Heater with thermostat

Available in two versions:
GRT70 = 70 WATT (for CSN 1 + 5)
GRT120 = 120 WATT (for CSN 6 + 12)

Coil voltage/frequency



Nominal values	Operating range
24/50	24 V/50 Hz
24/60	24 V/60 Hz
24/DC	24 V/DC 15 W
110/50	110-127 V/50 Hz
110/60	110-127 V/60 Hz
220/50	220-240 V/50 Hz
220/60	220-240 V/60 Hz

MECAIR RAIN TIGHT ENCLOSURE



CSN

DIMENSIONS (mm)



CSN 5

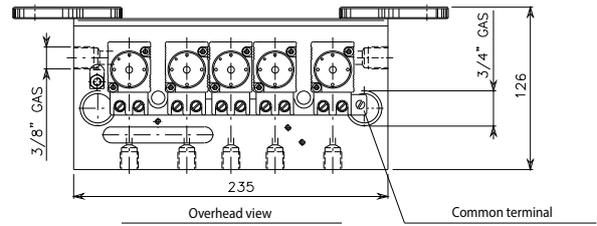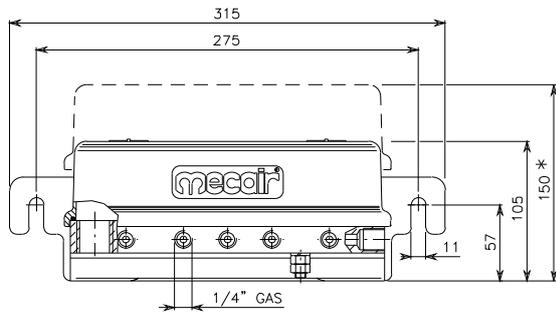

CSN 8

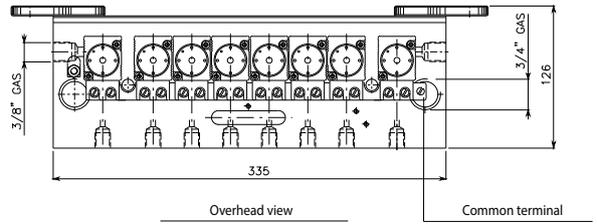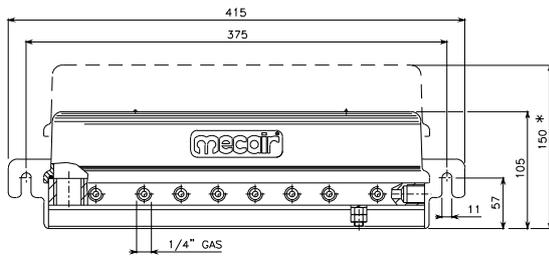

CSN 12

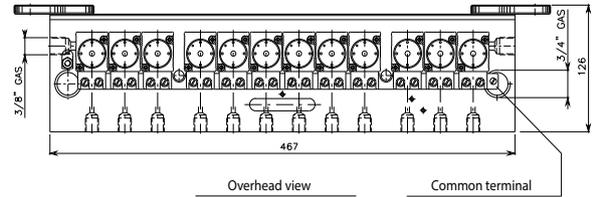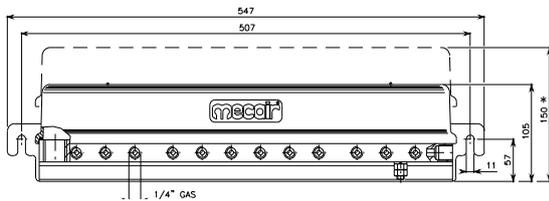

MECAIR RAIN TIGHT ENCLOSURE


CSN

ELECTRICAL AND PNEUMATIC CONNECTIONS

ELECTRICAL CONNECTION


- | | |
|---|--|
| A | Unscrew the screw (8) and remove cover (9). |
| B | Connect electric wires as shown [E1] on following sheet.
Cable entry (10): 3/4" Gas cylindrical thread.
Use multi-core cable: 1 wire to common pre-wired (11), +1 wire to each coil. |
| C | Connect heater thermostat (optional); see [E2] on following sheet. |
| D | Reassemble the cover (9); make sure of correct position of gasket (12). |

E1 – SEQUENCER (plug-in terminal connector)

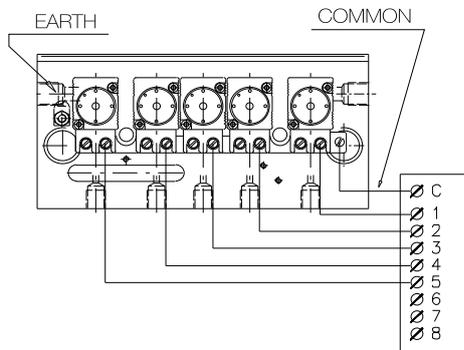

E2 – THERMOSTATICALLY CONTROLLED RESISTOR

KIT GRT 70 - 70 W for CSN 1-5
KIT GRT 120 - 120 W for CSN 6-8 e CSN 9-12

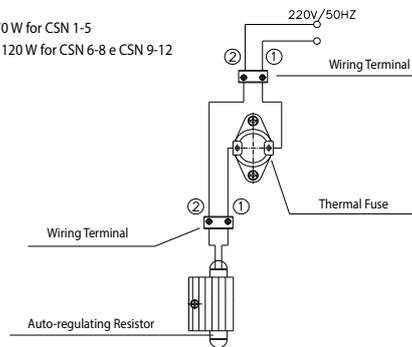

PNEUMATIC ASSEMBLY AND CONNECTIONS

Pneumatic Connections (6) 1/4" female Gas – valve connection with:

- Tube Ø 6/8 mm – Rilsan or stainless steel
- Max length 2 metres.


Fluid: Compressed air (or nitrogen) dried, filtered and oil free.


Min/max pressure 0.5-7.5 bar (when 7.5 bar exceeded, the plunger opens to avoid pressure build-up).

Exhaust Connections (7): connection 3/8" female Gas:

- open to atmosphere
- or muted with silencer
- or piped to an external tank for nitrogen recovery.

PNEUMATIC CONNECTIONS ON TANKS

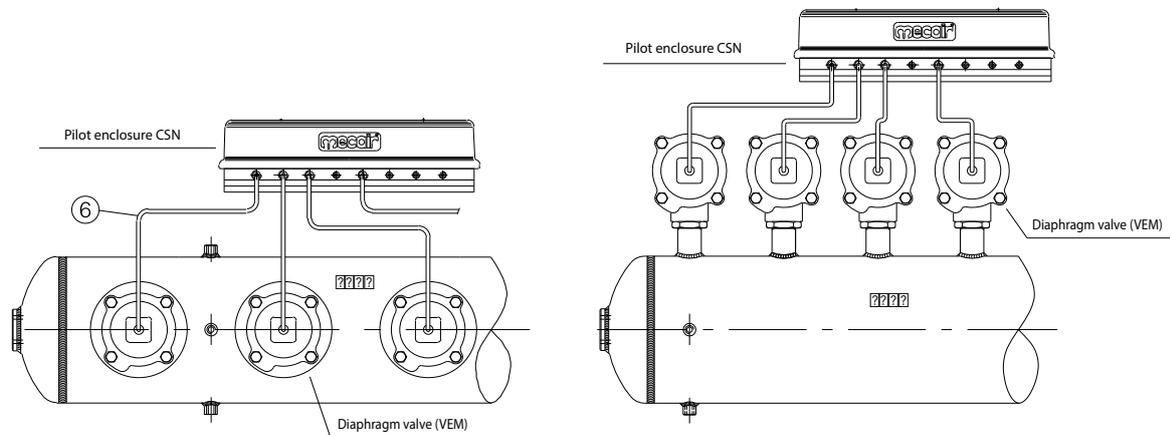

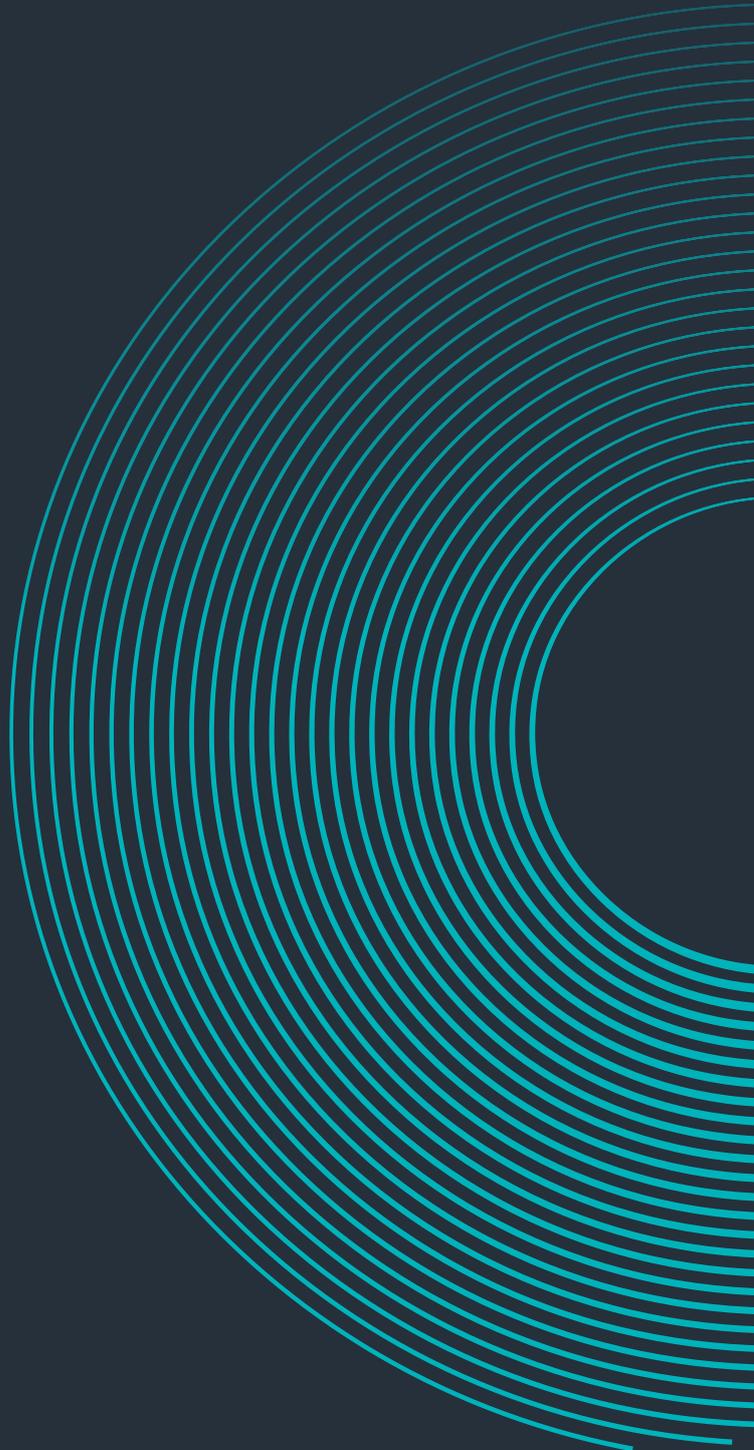

PM **FILTRATION**

PROTECTION | MANUTENTION | FILTRATION

99, rue du Beuvron
ZAC des Aulnaies - 45160 Olivet
T. : +33 (0)2 38 63 24 64
pmfiltration@pmfiltration.com

www.pmfiltration.com