

MECAIR

PASSE CLOISON

PTS-PTD



PROTECTION
MANUTENTION
FILTRATION

VRAC

PM
FILTRATION

PROTECTION | MANUTENTION | FILTRATION

www.pmfiltration.com

MECAIR BULKHEAD CONNECTORS



DESCRIPTION

The **bulkhead fittings** connect the valve to the blowtube through the wall of the filter. An important saving of time and material is allowed by the quickness of the connection to an unthreaded blowtube with no need for welding or use of additional fittings.

Two versions of the bulkhead compression fittings are available:

- **PTO**: two-piece tube connection fittings
- **PTS**: through tube connection fittings.

Use smooth, unthreaded pipes for connecting the header tank and filter blowtubes to the valve. Then tighten the quick-fit connections with the proper-size CH wrench (for nut rings) and PH (for bolts).

Note: Not to be used as a mechanical support for tank and valves.


GENERAL CHARACTERISTICS

Body Diecast aluminium (anodised)

Seals **Standard**
NBR: -30°C/+100°C
Optional
Silicon: -60°C/+200°C

ASSEMBLY OVERVIEW OF PTD

PTD ASSEMBLING LAYOUT WITH A TWO-PIECE PIPE

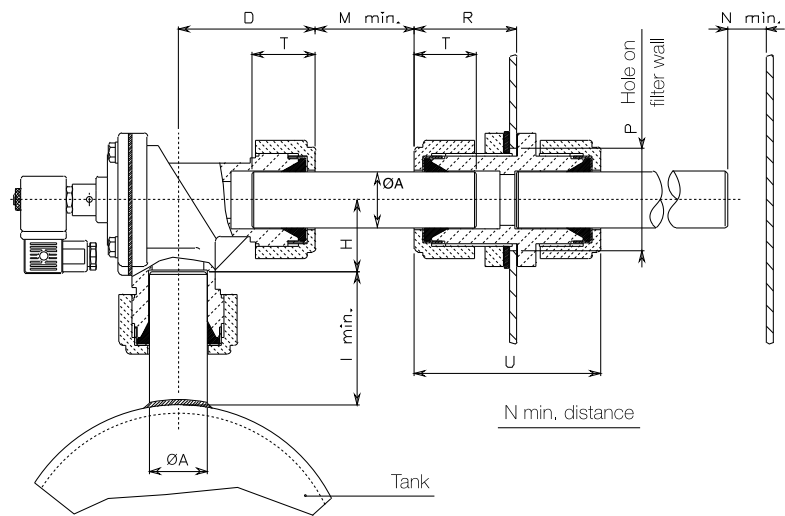


TYPE	Ø A	D	H	I	M	N	T	WEIGHT kg
VNP 306	¾"	67	40	50	56	48	30	0.9
VNP 308	1"	80	48	50	70	50	36	1.2
VNP 314	1½"	99	53	85	80	54	42	2.3

TYPE	Ø A	R	Ø P	P Ø max.	U	WEIGHT kg
PTD 306	¾"	51	42	45	102	0.35
PTD 308	1"	55	54	58	106	0.6
PTD 314	1½"	74	70	74	140	1.3
PTD 316	2"	77	84	86	148	2

MECAIR BULKHEAD CONNECTORS


PTS ASSEMBLY LAYOUT WITH SINGLE PIPE

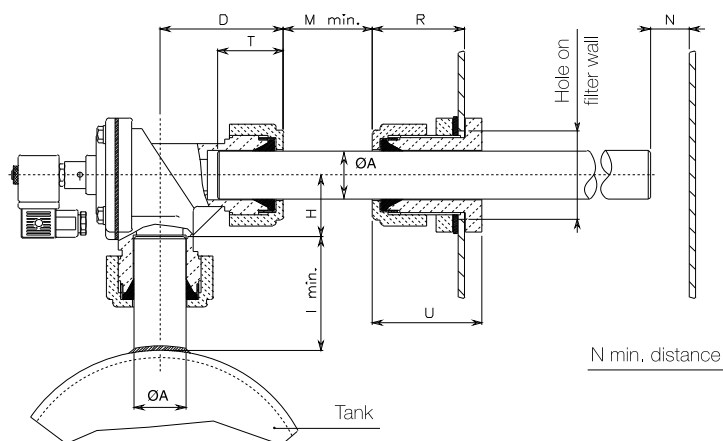

TYPE	Ø A	D	H	I	M	N	T	WEIGHT kg
VNP 306	¾"	67	40	50	56	48	30	0.9
VNP 308	1"	80	48	50	70	50	36	1.2
VNP 314	1½"	99	53	85	80	54	42	2.3

TYPE	Ø A	R	Ø P	P Ø max.	U	WEIGHT kg
PTS 306	¾"	51	42	45	65	0.25
PTS 308	1"	55	54	58	68	0.4
PTS 314	1½"	74	70	74	94	0.86
PTS 316	2"	77	84	86	96	1.65

DIAPHRAGM VALVE SERIES 300

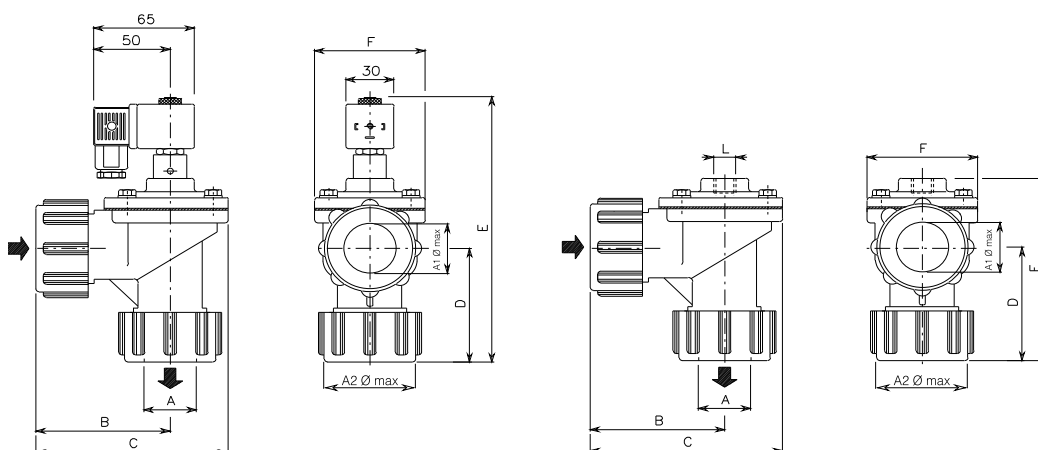


MODEL	Ø A1		A1 Ø MAX	A2 Ø max.	CH WRENCH
306	¾"	26.7	27	48	CH06
308	1"	33.4	33.8	61	CH08
314	1½"	48.3	48.8	82	CH14


MECAIR BULKHEAD CONNECTORS

PART NUMBER AND DIMENSIONS

PTD 3

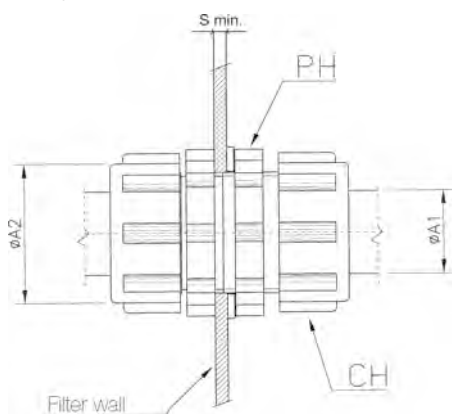

PTS 3

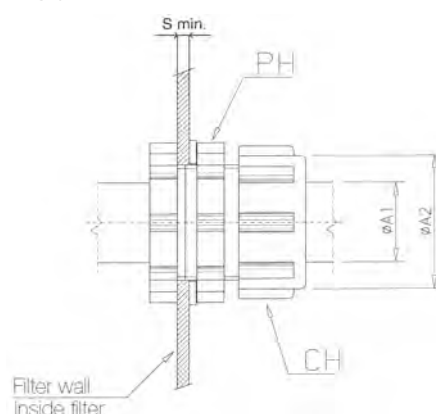

MODEL	Ø A1		A1 Ø max.	A2 Ø max.	CH WRENCH	PH WRENCH
PTD 306	¾"	26.7	27	48	CH06	PH06
PTD 308	1"	33.4	33.8	61	CH08	PH08
PTD 314	1½"	48.3	48.8	85	CH14	PH14
PTD 316	2"	60.3	60.8	95	CH16	PH16


MODEL	Ø A1		A1 Ø max.	A2 Ø max.	CH WRENCH	PH WRENCH
PTS 306	¾"	26.7	27	48	CH06	PH06
PTS 308	1"	33.4	33.8	61	CH08	PH08
PTS 314	1½"	48.3	48.8	82	CH14	PH14
PTS 316	2"	60.3	60.8	95	CH16	PH16

ASSEMBLING CH AND PH WRENCHES

MODEL	Ø A1	Ø A2	Ø B	C	D	E	WEIGHT kg
CH06	3/4"	48	80	200	280	55	0.24
CH08	1"	61	100	250	350	68	0.44
CH14	1 1/2"	82	130	300	430	85	0.7
CH16	2"	95	150	350	500	100	0.78
CH20	2 1/2"	115	170	350	520	110	0.8
CH24	3"	128	190	350	540	120	0.9

MODEL	Ø A1	Ø A2	Ø B	C	D	E	WEIGHT kg
PH06	3/4"	55	80	200	280	55	0.24
PH08	1"	70	100	260	360	65	0.31
PH14	1 1/2"	90	130	270	400	85	0.5
PH16	2"	95	150	350	500	100	0.78


CH and PH

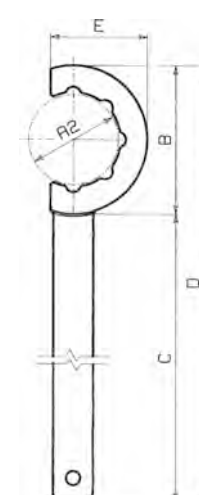


MECAIR BULKHEAD CONNECTORS

PART NUMBER AND DIMENSIONS

PTD 3

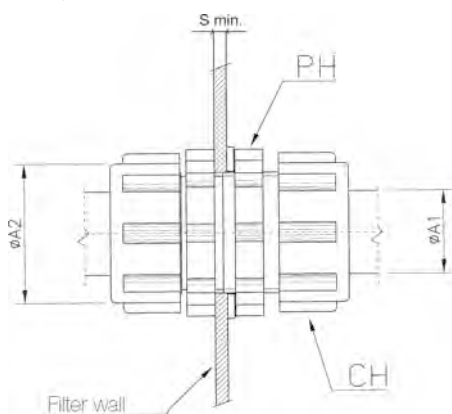

PTS 3

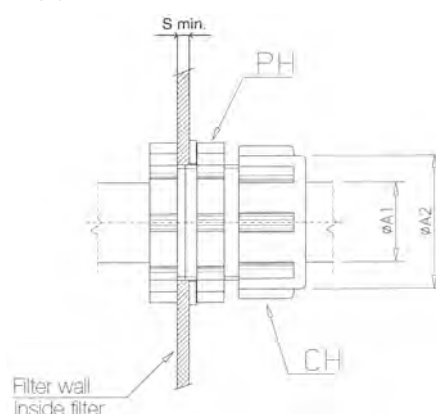

MODEL	Ø A1		A1 Ø max.	A2 Ø max.	CH WRENCH	PH WRENCH
PTD 306	¾"	26.7	27	48	CH06	PH06
PTD 308	1"	33.4	33.8	61	CH08	PH08
PTD 314	1½"	48.3	48.8	85	CH14	PH14
PTD 316	2"	60.3	60.8	95	CH16	PH16


MODEL	Ø A1		A1 Ø max.	A2 Ø max.	CH WRENCH	PH WRENCH
PTS 306	¾"	26.7	27	48	CH06	PH06
PTS 308	1"	33.4	33.8	61	CH08	PH08
PTS 314	1½"	48.3	48.8	82	CH14	PH14
PTS 316	2"	60.3	60.8	95	CH16	PH16


ASSEMBLING CH AND PH WRENCHES

MODEL	$\phi A1$	$\phi A2$	ϕB	C	D	E	WEIGHT kg
CH06	3/4"	48	80	200	280	55	0.24
CH08	1"	61	100	250	350	68	0.44
CH14	1 1/2"	82	130	300	430	85	0.7
CH16	2"	95	150	350	500	100	0.78
CH20	2 1/2"	115	170	350	520	110	0.8
CH24	3"	128	190	350	540	120	0.9

MODEL	$\phi A1$	$\phi A2$	ϕB	C	D	E	WEIGHT kg
PH06	3/4"	55	80	200	280	55	0.24
PH08	1"	70	100	260	360	65	0.31
PH14	1 1/2"	90	130	270	400	85	0.5
PH16	2"	95	150	350	500	100	0.78

CH and PH

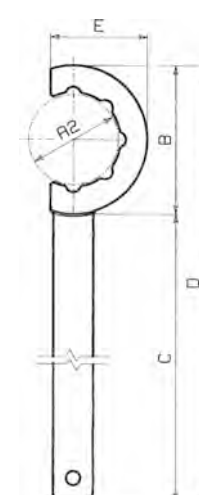

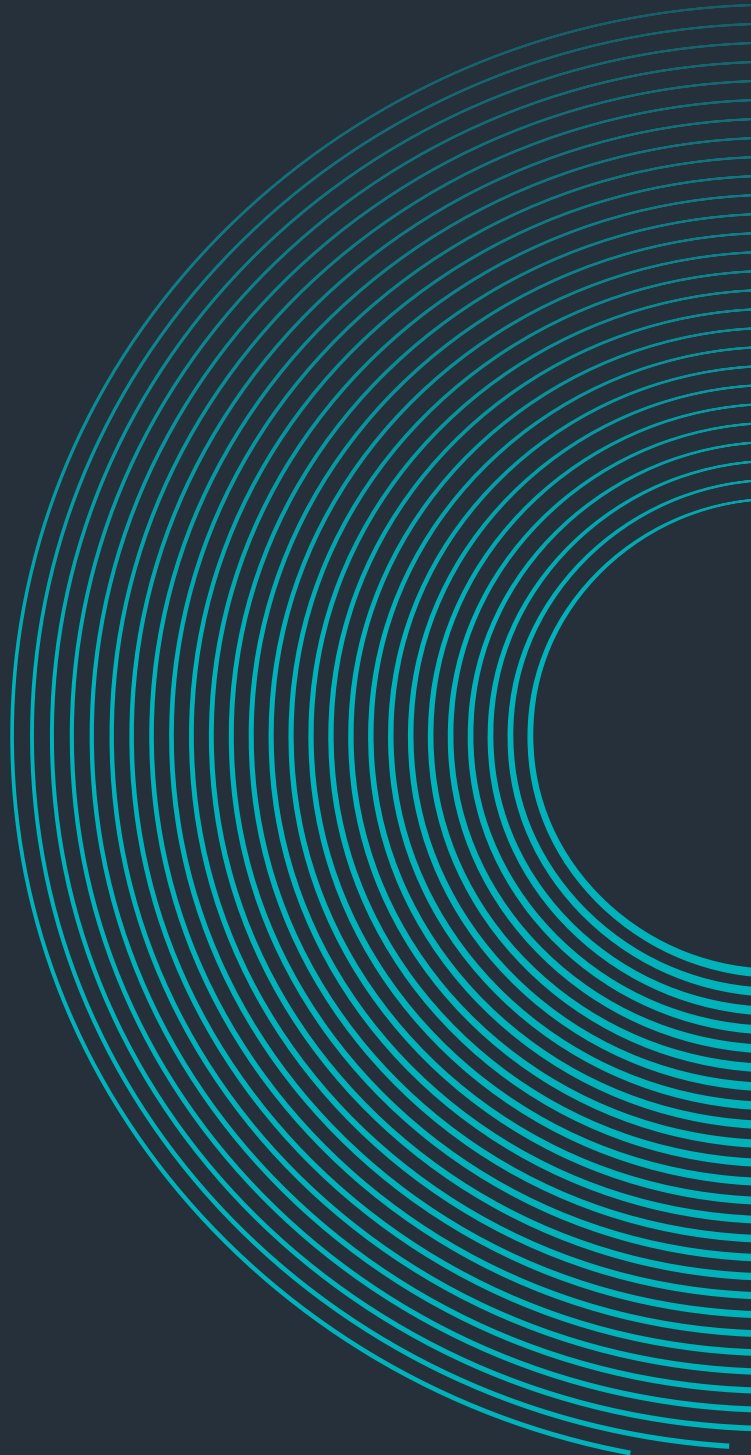

PROTECTION | MANUTENTION | FILTRATION

99, rue du Beuvron
ZAC des Aulnaies - 45160 Olivet
T. : +33 (0)2 38 63 24 64
pmfiltration@pmfiltration.com

www.pmfiltration.com